

PRODUCT SPECIFICATION

Part Number PLH2020CA6-WCRGB1

Details

• 2.0 x 2.0 x 0.65mm RGB LED with integrated IC.


Applications

- Full color LED string light
- LED full color module
- LED guardrail tube
- LED scene lighting
- LED point light
- LED pixel screen
- LED shaped screen

Features

- Top SMD internal integrated high quality external control line serial cascade constant current IC; 5Vapplication; default on electric lights.
- Control circuit and the RGB chip in SMD 2020 components, to form a complete control of pixel, color mixing uniformity and consistency.
- Two-wire synchronous control.
- Three RGB output control, 8Bit (256) color; 5Bit (32) to adjust the brightness
- Three constant current drive, self-detection function specific signal.
- Maximum frequency of 30MHZ serial data input.
- Double data transmission, built-in support uninterrupted oscillation PWM output, can maintain a static image.

Package Outline Dimensions & Pin Configuration

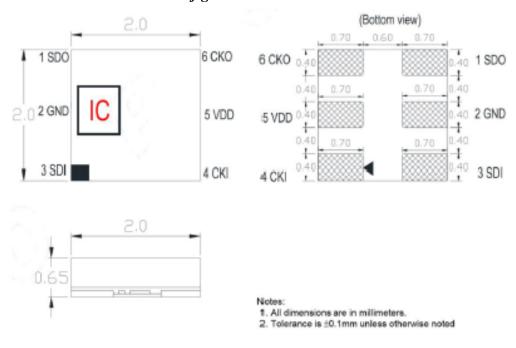

Note:

1. Specifications subject to change without notice





Pin Configuration


| Item | Symbol | Pin Name | Function description |
|------|--------|------------|---|
| 1 | SDO | Data Input | control signal output data |
| 2 | GND | Ground | The signal and power supply and grounding |
| 3 | SDI | Data Input | control signal Input data |
| 4 | CKI | CLK Input | control signal Input Clock data |
| 5 | VDD | Power | power supply pin |
| 6 | СКО | CLK Output | control signal output Clock data |

Notes:

^{1.} Dimension in millimeter, tolerance is ± 0.1 mm unless otherwise noted.

| Number | Symbol | Pin Name | Function Description |
|--------|--------|-------------|---------------------------------------|
| 1 | SDO | Data Output | control signal output data |
| 2 | GND | Ground | The signal and power supply grounding |
| 3 | SDI | Data Input | control signal Input data |
| 4 | CKI | CLK Input | control signal Input Clock data |
| 5 | VDD | Power | power supply pin |
| 6 | СКО | CLK Output | control signal output Clock data |

Soldering Pad Size

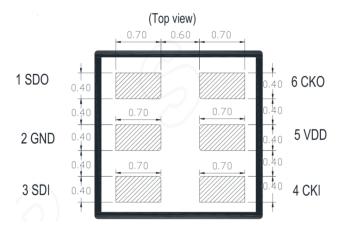



Absolute Maximum Rating (Ta = 25 °C, VSS=0V)

| Parameter | Symbol | Range | Unit |
|-----------------------|----------|-------------------|------|
| Power supply voltage | V_{DD} | +3.7~+5.5 | V |
| Logic input voltage | V_{IN} | -0.3 ~VDD+0.3 | V |
| Operating temperature | Торт | -40 ∼ +80 | °C |
| Storage temperature | Tstg | - 40 ∼ +80 | °C |
| ESD pressure (HBM) | VESD | 4K | V |
| ESD pressure (DM) | VESD | 200 | V |

LED Characteristics (TA = 25°C)

| Cultur | 5mA | | |
|--------|----------------|----------------------|--|
| Color | Wavelength(nm) | Light Intensity(mcd) | |
| Red | 620-630 | 100-200 | |
| Green | 520-530 | 300-500 | |
| Blue | 460-475 | 50-100 | |



Recommended Operating Ranges (unless otherwise specified, $Ta = -20 \sim +70$ °C, $VDD = 4.5 \sim 5.5V$, VSS = 0V)

| Parameter | Symbol | Min. | Тур. | Max | Unit | Test conditions |
|--------------------------------|------------------|------|------|-----|------|-----------------|
| The chip supply voltage | V_{DD} | 1 | 5.0 | 5.5 | V | - |
| R/G/B port pressure | VDS,MAX | 1 | 1 | 17 | V | - |
| The maximum LED output current | I _{max} | 1 | 1 | 20 | mA | - |
| The clock high level width | TCLKH | - | 17 | 1 | ns | - |
| The clock low level width | TCLKL | 1 | 17 | 1 | ns | - |
| Data set up time | TSETUP | 1 | 1 | 10 | ns | - |
| The frequency of PWM | F_{PWM} | - | 4 | - | KHZ | - |
| Static power consumption | I_{DD} | - | 1 | - | mA | - |



Featured Descriptions


(1) Series data structure



Start Frame 32 Bits

| 0000 0000 | 0000 0000 | 0000 0000 | 0000 0000 |
|-----------|-----------|-----------|-----------|
| 9 Bite | g Bite | 8 Rits | 9 RIte |

LED Frame 32 Bits




End Frame 32 Bits

| | 1111 1111 | 1111 1111 | 1111 1111 | 1111 1111 |
|---|-----------|-----------|-----------|-----------|
| _ | 8 Bits | 8 Bits | 8 Bits | 8 Bits |

(2) 256 level gray level

| Data | Duty Cycle |
|-----------|------------|
| MSBLSB | |
| 0000 0000 | 0/256 |
| 0000 0001 | 1/256 |
| 0000 0010 | 2/256 |
| - | - |
| - | - |
| - | - |
| - | - |
| - | - |
| - | - |
| 11111101 | 253/256 |
| 1111 1110 | 254/256 |
| 1111 1111 | 255/256 |

(3) PWM input / output signal relationship

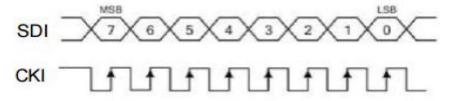



(4) 5-Bit (level 32) brightness adjustment (simultaneous control of OUTR\OUTG\OUTB three ports current):


| Current level | numerical value (MSBLSB) | Current adjustment | Corresponding current value (mA) | Remarks |
|------------------|-----------------------------|-----------------------|----------------------------------|--------------------------------|
| 1 | 00000 | 0/31 | 0 | |
| 2 | 00001 | 1/31 | 0.581 |] |
| 3 | 00010 | 2/31 | 1.162 | 1 |
| 4 | 00011 | 3/31 | 1.743 |] |
| 5 | 00100 | 4/31 | 2.324 | Suggested Current: 1-10 |
| 6 | 00101 | 5/31 | 2.905 | Current Regulation Level |
| 7 | 00110 | 6/31 | 3.486 | Regulation tever |
| 8 | 00111 | 7/31 | 4.067 | . 1 |
| 9 | 01000 | 8/31 | 4.648 |) <i>)</i> |
| *10 | 01001 | 9/31 | 5.229 | |
| 11 | 01010 | 10/31 | 5.81 | |
| 12 | 01011 | 11/31 | 6.391 | |
| 13 | 01100 | 12/31 | 6.972 | |
| 14 | 01101 | 13/31 | 7.553 | |
| 15 | 01110 | 14/31 | 8.134 | |
| 16 | 01111 | 15/31 | 8.715 | |
| 17 | 10000 | 16/31 | 9.296 | |
| 18 | 10001 | 17/31 | 9.877 | Based on the heat dissipation |
| 19 | 10010 | 18/31 | 10.458 | of the product, |
| 20 | 10011 | 19/31 | 11.039 | the current of this product is |
| 21 | 10100 | 20/31 | 11.62 | recommended |
| 22 | 10101 | 21/31 | 12.201 | to be used at a maximum of |
| 23 | 10110 | 22/31 | 12.782 | 5.229 mA, and the current |
| 24 | 10111 | 23/31 | 13.363 | regulation level |
| 25 | 11000 | 24/31 | 13.944 | of 11-31 is not recommended. |
| 26 | 11001 | 25/31 | 14.525 |] |
| 27 | 11010 | 26/31 | 15.106 | |
| 28 | 11011 | 27/31 | 15.687 |] |
| 29 | 11100 | 28/31 | 16.268 | |
| 30 | 11101 | 29/31 | 16.849 |] |
| 31 | 11110 | 30/31 | 17.43 |] |
| 32 | 11111 | 31/31 | 18 |] |

(5) Refresh Rate

Frame rate = 1/((64+(32* points))*CKI (cycle), (unit: frames per second) Such as: 1024 points, CKI frequency is 1MHZ, is =30 frames per second frame rate.



Typical Application Circuit

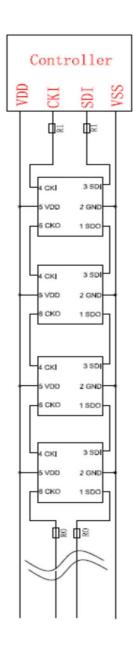


To avoid circuity surge from damaging the IC, protection resistor is suggested to be added in the circuit design. Capacitors are also suggested to be added to enhance the stability of IC performance.


- **When used in LED strip where LED pitch is short, protection resistors are suggested to be placed at signal line input/output and clock line input/output. Suggested resistor values at R1= R0 of about 550 ohms.
- **When used in module or general applications where pitch is long, protection resistor value needs to be adjusted based on pitch distance and line material.




LED Performance Graph

Wavelength Characteristics

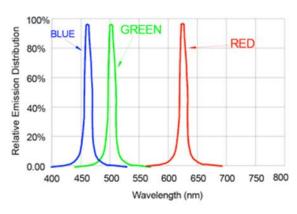

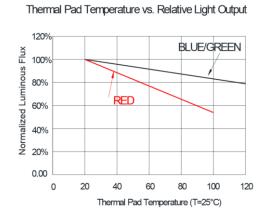

Typical Radiation Pattern 160°

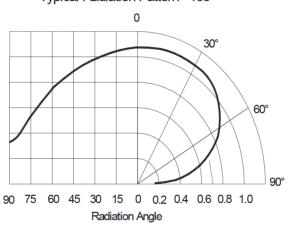

www.p-tec.net 032122 Rev0 MS Page 8 of 13



Ordering Information

| Product | Emission Color | IV(mcd) | Orderable Part Number |
|-------------------|----------------|---------|--------------------------|
| | R | 100-200 | |
| PLH2020CA6-WCRGB1 | G | 300-500 | PLH2020CA6-WCRGB1 |
| | В | 50-100 | |



Precautions


Please read the following notes before using the product:

- 1. Storage
- 1.1 Do not open moisture proof bag before the products are ready to use.
- 1.2 Before opening the package, the LEDs should be kept at 30°C or less and 80%RH or less.
- 1.3 The LEDs should be used within a year.
- 1.4 After opening the package, the remaining LEDs should be kept in a resealed bag.

| 1.5 The LEDs require mandatory baking before usage. Baking treatment listed below.1.6 If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. | | | | |
|--|--|--|--|--|
| *Baking treatment: 60±5°C for24 hours. | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



2. Soldering Condition Recommended soldering conditions:

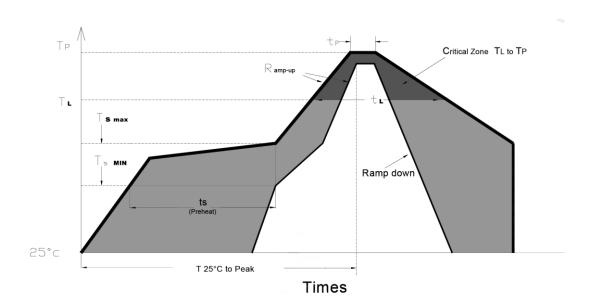

| Profile Feature | Lead-Free Solder |
|--|------------------|
| Average Ramp-Up Rate (Ts max to Tp) | 3°C/second max. |
| Preheat: Temperature Min (Ts min) | 150°C |
| Preheat: Temperature Min (Ts max) | 200 °C |
| Preheat: Time (ts min to ts max) | 60-180 seconds |
| Time Maintained Above: Temperature (T _L) | 217 °C |
| Time Maintained Above: Time (t L) | 60-150 seconds |
| Peak/Classification Temperature (T P) | 240 ℃ |
| Time Within 5°C of Actual Peak Temperature (tp) | <10 seconds |
| Ramp-Down Rate | 6°C/second max. |
| Time 25 °C to Peak Temperature | <6 minutes max. |

Note: Excessive soldering temperature and / or time might result in deformation of the LED lens or catastrophic failure of the LED.




3. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

4. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.



5. Caution in ESD

Static Electricity and surge damages the LED. It is recommended to use a wristband or antielectrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.Re: da



| Record of Revisions | | | |
|---------------------|---------------|------|----------|
| Rev. | Comments | Page | Date |
| 0 | Released Spec | | 03/21/22 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | - |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |