

P-tec Corp. Tel:(866) 695 4162
 2405 Commerce Circle Tel:(719) 589 3122
 Alamosa CO 81101 Fax:(719) 589 3592
 www.p-tec.net



PD001 Series Single Digit Mini 7 Segment 0.3" Display

Features

- *Single Digit .3" (7.62mm) Yellow Display with 10 Pins
- *Space Saving Small Body Size
- *Low Current Requirements
- *High Light Output
- *IC Compatible
- *High Reliability
- *Gray Face, White Segments
- *RoHS Compliant


Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Power Dissipation.....	78mW
Reverse Voltage (<100 μ A).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range.....	-25 $^\circ\text{C}$ to +85 $^\circ\text{C}$
Storage Temperature Range.....	-40 $^\circ\text{C}$ to +100 $^\circ\text{C}$
Soldering Temperature (1.6 mm below body).....	260 $^\circ\text{C}$ for 5 seconds

Electrical & Optical Characteristics at $T_A = 25^\circ\text{C}$

Part Number		Emitting Color	Chip Material	Peak Wave Length	Dominant Wave Length	Forward Voltage @20mA (V)		Luminous Intensity @10mA (mcd)	
						Typ	Max	Min	Typ
Common Anode	Common Cathode			nm	nm				
PD001-CADY01	PD001-CCDY01	Yellow	GaAsP/GaP	585	590	2.1	2.6	2.0	4.0

All dimensions are in **Millimeters**. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified. The Slope Angle of any Pin may be $\pm 5^\circ$ max.

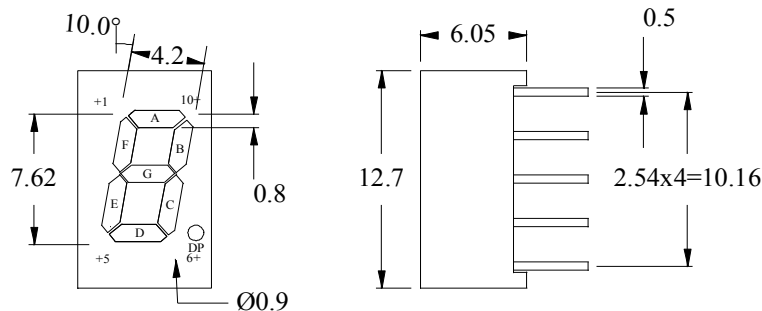

Pin Function	
Common Anode Pin #	Common Cathode Pin #
1 Common Anode	1 Common Cathode
2 Cathode F	2 Anode F
3 Cathode G	3 Anode G
4 Cathode E	4 Anode E
5 Cathode D	5 Anode D
6 Common Anode	6 Common Cathode
7 Cathode DP	7 Anode DP
8 Cathode C	8 Anode C
9 Cathode B	9 Anode B
10 Cathode A	10 Anode A