

Device Selection Guide

Model Number	Chip		Description	Note
	Material	Emitting Color		
PDC402SM-CxDG05	InGaN	True Green	Common Cathode x=C / Common Anode x=A	Add “BFWS” to end of part number for Black Face, White Segment version
PDC402SM-CxDG17	AlInGaP	Yellow Green		
PDC402SM-CxDY04		Yellow		
PDC402SM-CxDA11		Amber		
PDC402SM-CxDR02		Orange-Red		
PDC402SM-CxDR11		Red		
PDC402SM-CxDR21		Deep Red		

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating		Unit
		G17/Y04/A11/R02/R11/R21	G05	
Power Dissipation per Dice	P _{AD}	70	114	mW
Derating Liner from 25°C per Dice	--	0.33	0.4	mA/°C
Continuous Forward Current Per Dice	I _{AF}	25	30	mA
Peak Current Per Dice (duty cycle 1/10, 1KHz)	I _{PF}	90	100	mA
Reverse Voltage Per Dice	V _R	5	5	V
Electrostatic Discharge (HBM)	ESD	/	1000	V
Operating Temperature	T _{opr}	-40~+105		°C
Storage Temperature	T _{stg}	-40~+105		°C

Electrical and Optical Characteristics at Ta=25°C

Parameter	Symbol	Chip	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment	VF	G05	--	3.2	3.8	V	IF=20mA
		G17/Y04/A11/ R02/R11/R21	--	2	2.8		
Luminous Intensity Per Segment	Iv	G05	--	47	--	mcd	IF=10mA
		G17	--	2	--		
		Y04	--	13	--		
		A11	--	13	--		
		R02	--	5	--		
		R11	--	4	--		
		R21	--	4	--		
Peak Emission Wavelength / Dominant Wavelength	λ_P/λ_d	G05	--	*525	--	nm	IF=20mA
		G17	--	572/570	--		
		Y04	--	592/590	--		
		A11	--	612/605	--		
		R02	--	632/625	--		
		R11	--	644/630	--		
		R21	--	660/645	--		
Reverse Current	IR		--	--	100	μ A	VR=5V
Luminous Intensity Matching Ratio	Iv-m		--	--	2:1	--	IF=10mA

Typical Electrical/Optical Characteristic Curves

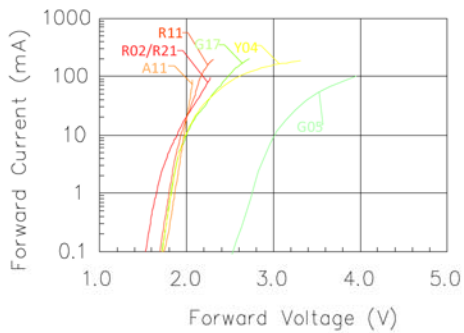


Fig 1. Forward Current vs. Forward Voltage

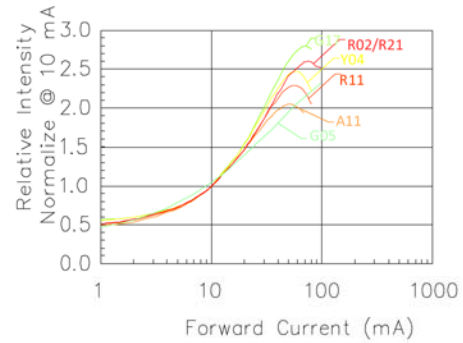


Fig 2. Relative Intensity vs. Forward Current

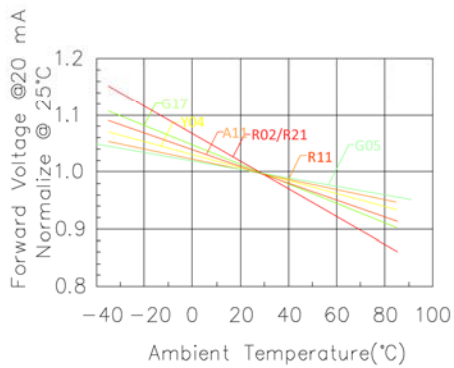


Fig 3. Forward Voltage vs. Temperature

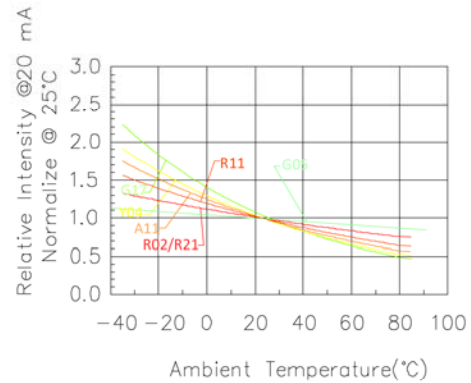


Fig 4. Relative Intensity vs. Temperature

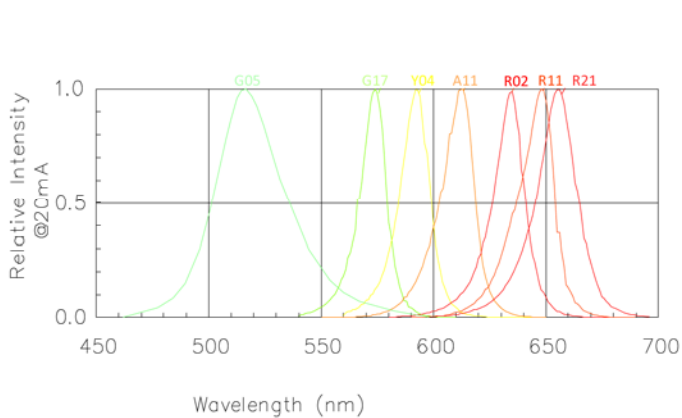


Fig 5. Relative Intensity vs. Wavelength

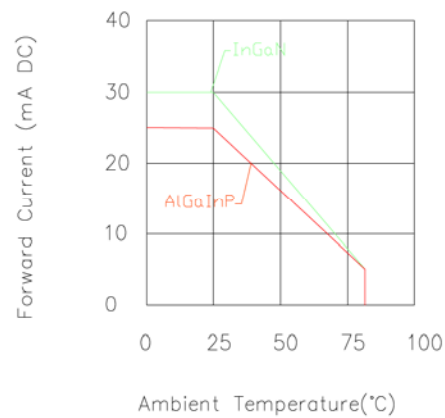


Fig 3. Forward Current vs. Ambient Temperature



Luminous General lv Bin Grade (IF = 10mA)

Color Rank Limits (IF=20mA)

Remark: Unit=mcd

*Tolerance: $\pm 20\%$

Remark: Unit=nm

*Tolerance: ± 1

● Pure Green(G05)

M	N	P
27.559	44.096	70.555
I	I	I
44.095	70.554	112.888

1	2	3	4	5
515.0	517.0	519.0	521.0	523.0
I	I	I	I	I
517.0	519.0	521.0	523.0	525.0

● Yellow Green(G17)

E	F	G
1.025	1.641	2.627
I	I	I
1.640	2.626	4.203

0	1	2	3	4
567.5	569.5	570.5	571.5	573.0
I	I	I	I	I
569.4	570.4	571.4	572.9	575.0

● Yellow (Y04)

J	K	L
6.727	10.764	17.224
I	I	I
10.763	17.223	27.558

1	2	3	4	5
583.0	585.0	587.0	589.0	591.0
I	I	I	I	I
585.0	587.0	589.0	591.0	593.0

● Amber (A11)

J	K	L
6.727	10.764	17.224
I	I	I
10.763	17.223	27.558

● Orange (R02)

G	H	J
2.627	4.204	6.727
I	I	I
4.203	6.726	10.763


● Red (R11)

F	G	H
1.641	2.627	4.204
I	I	I
2.626	4.203	6.726


● Deep Red (R21)

F	G	H
1.641	2.627	4.204
I	I	I
2.626	4.203	6.726


All Light-On Segments Feature & Pad Position

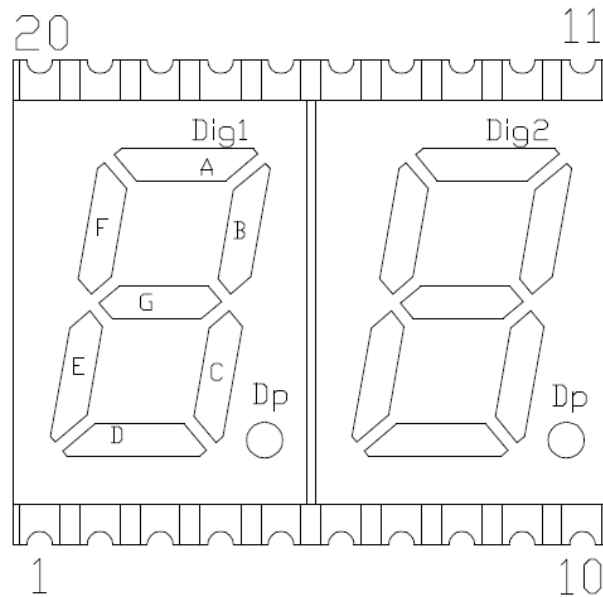

Internal Circuit Diagram

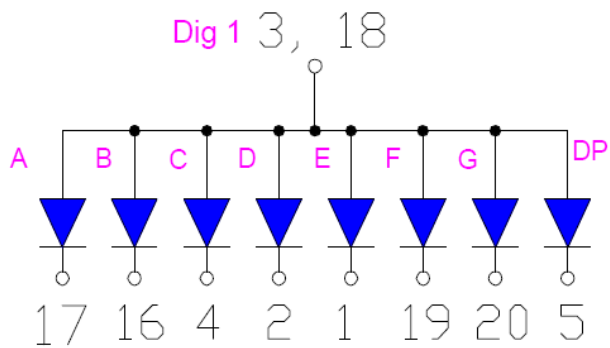

Common Anode

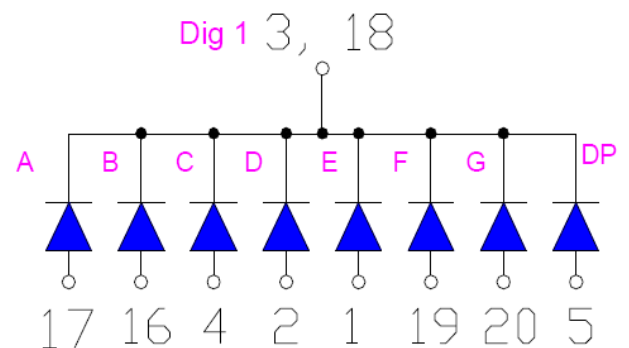


Common Cathode

Precautions for Use

1. SMT Reflow Soldering Instruction


1.1. IR Reflow Temperature / Time:

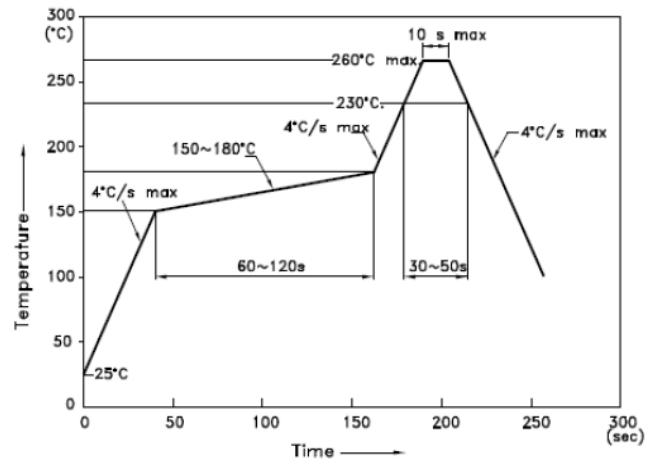


NOTES:

1. We recommend the reflow temperature 245°C(±5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


1.2. Recommended Soldering Pad:

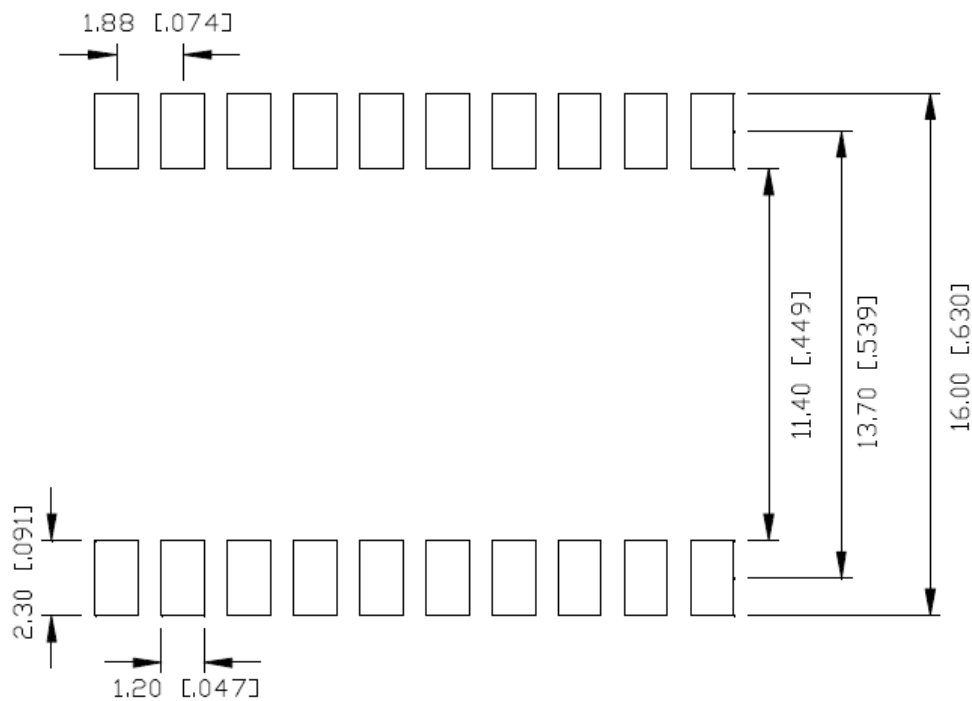

Reel Dimensions

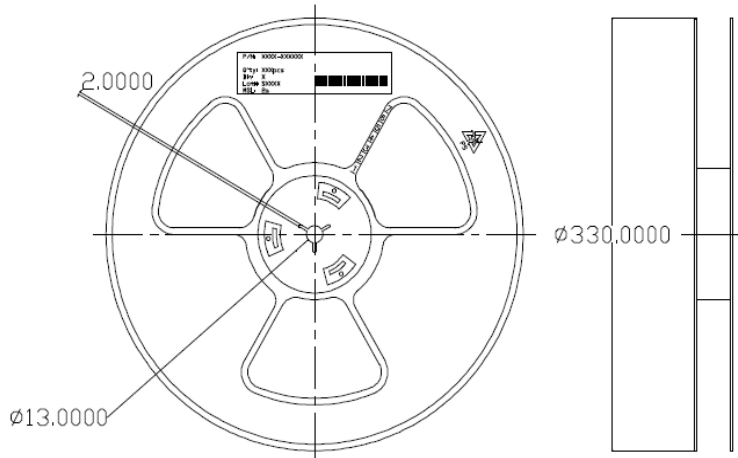

Packing Dimensions

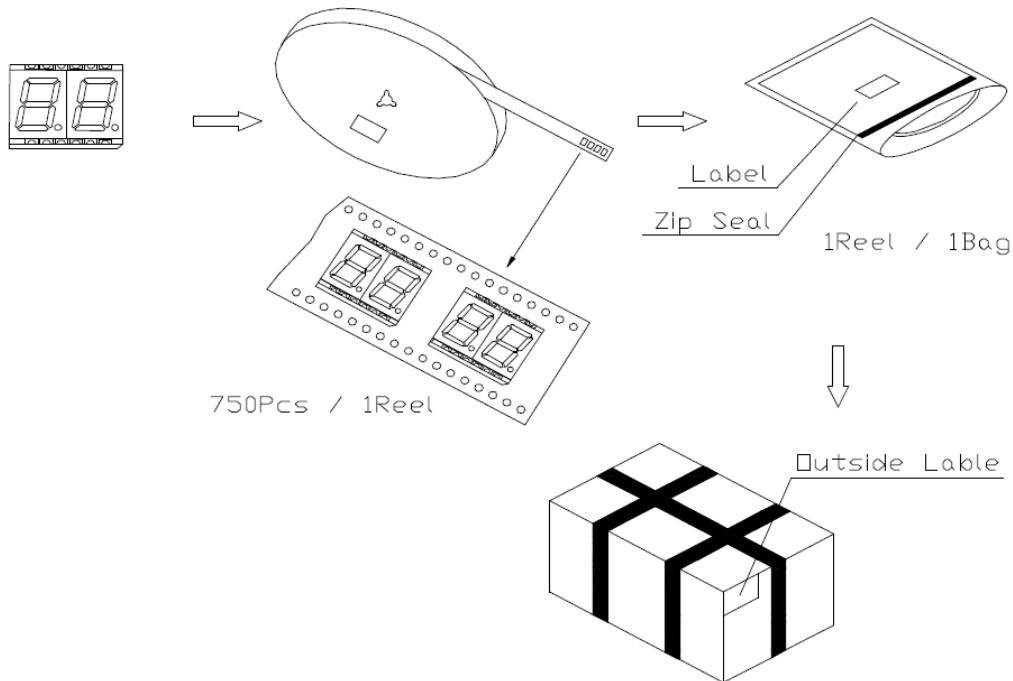

Note: 1. Specifications subject to change without notice.



Customer Approval Signatures	Approved By	Checked By	Prepared By

[illegible]