

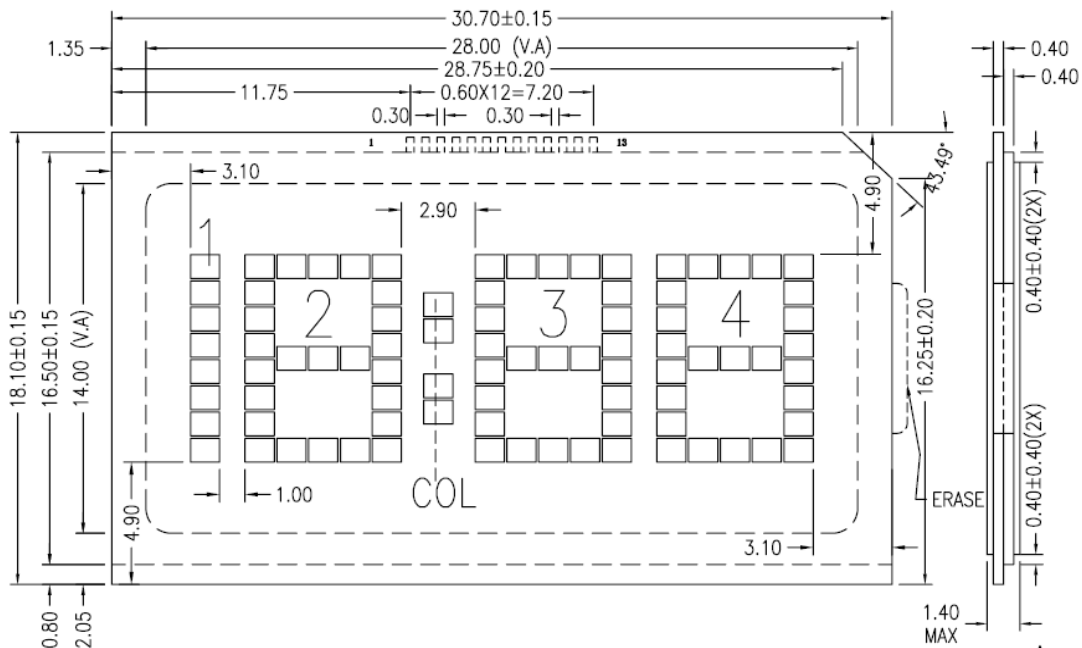


PRODUCT SPECIFICATION

Part Number **PC391-O**

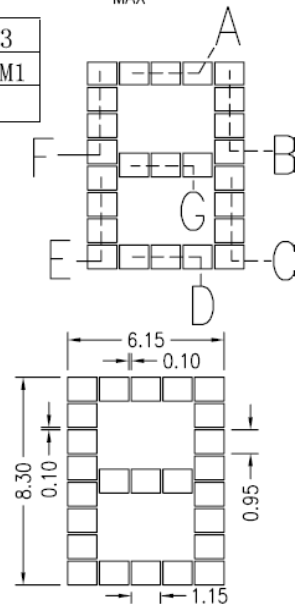

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
|------|------|-----|----|----|----|-----|----|-----|----|----|----|----|------|
| COM1 | | 2D | 2E | 2G | 2C | 4D | 3E | 3G | 3C | 4E | 4G | 4C | COM1 |
| COM2 | COM2 | 1BC | 2F | 2A | 2B | COL | 3F | 3AD | 3B | 4F | 4A | 4B | |

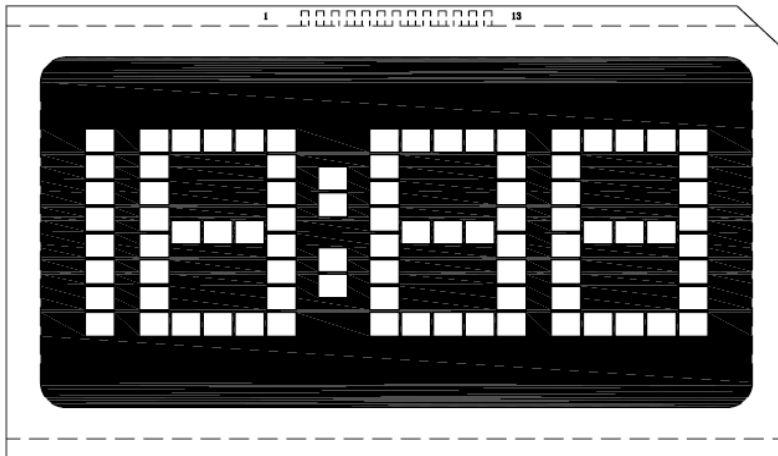

NOTES:

- | | | | |
|-----------------------|------------------------|-----------------------|-------------|
| 1. DISPLAY TYPE: | TN | 5. OPERATING VOLTAGE: | 4.5 V |
| 2. VIEWING DIRECTION: | 6:00 | 6. OPERATING TEMP: | -10°C~60°C |
| 3. POLARIZER MODE: | NEGATIVE/TRANSFLECTIVE | 7. STORAGE TEMP: | -20°C~70°C |
| 4. DRIVER METHOD: | 1/4 DUTY 1/3 BIAS | 8. CONNECTOR: | WITHOUT PIN |



| Customer Approval Signatures | Approved By | Checked By | Prepared By |
|------------------------------|-------------|------------|-------------|
| | | | |

| Record Of Revisions | | |
|---------------------|-----|--------------|
| Rev.0 01.13.24 | JAS | Layout Start |
| Rev.1 03.24.15 | JAS | Logo update |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |