



PRODUCT SPECIFICATION

Part Number

PT6448104A-MLMWF-EM08

CUSTOMER	
CUSTOMER PART NUMBER	
DESCRIPTION	
APPROVED BY	
DATE	

**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

2

1. Table of Contents

No.	Contents	Page
1	Table of Contents	2
2	Record of Revisions	3
3	Module Numbering System	4
4	Application	5
5	Features	5
6	General Specifications	5
7	Absolute Maximum Ratings	6
8	Electrical Characteristics	7
9	Block Diagram	10
10	Input / Output Terminals Pin Assignment	11
11	Interface Timing	14
12	Optical Characteristics	17
13	Reliability Test	20
14	Packaging	21
15	Precautions	22
16	Outline Drawing	23
17	Definition of Labels	24
18	Incoming Inspection Standards	26

[illegible]

**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

4

3. Module Numbering System

P T _____ - _____ - _____

1. 2. 3. 4. 5. 6. 7. 8. 9 10. 11. 12. 13. 14.

1. P-TEC TFT

2. LENGTH x WIDTH PIXELS

If third character is a zero, it is removed to shorten part number. Example: 240 x 320 = PT3224

3. DIAGONAL DIMENSIONS

Example: 3.5" display = 35 in part number

4. PRODUCT VERSION

Series assigned by P-tec

5. LCD MODE

T: TN
I: IPS
V: VA

6. POLARIZER

LM: Transmissive
LF: Transflective

7. BACKLIGHT COLOR

No Backlight: Left Blank
W: White
B: Blue/Green
S: Yellow/Green

8. VIEWING DIRECTION

D: 6 o'clock
U: 12 o'clock
F: Full Viewing Angle

9. A ~ Z CODE

Assigned by P-tec

11. TEMPERATURE RANGE

Normal: Left Blank
Wide: X

12. LUMINANCE

N: Normal (<300 nit)
M: Middle (>= 300 nit)
H: High (> 600 nit)

13. TOUCH PANEL OPTION

No TP: Left Blank
C: Capacitive TP
R: Resistive TP

14. SPECIAL CHARACTERS

Customer special requirements



4. Application

This specification is applied to the 10.4 inch VGA supported TFT-LCD module, and can display true 262K colors (6-bits colors with FRC). The module is designed for OA, Car TV application and other electronic products which require flat panel display of digital signal interface. This module is composed of a 10.4" TFT-LCD panel, a driver circuit and backlight unit.

5. Features

- VGA (640×480 pixels) resolution.
- Digital 18 bit parallel RGB.
- Dot inversion mode with stripe type.
- MVA type

6. General Specifications

Item	Specifications	Unit
Screen Size	10.4 (Diagonal)	inch
Display Format	640RGB(H)×480(V)	dot
Active Area	211.2(H)×158.4(V)	mm
Pixel Pitch	0.33(H)×0.33(V)	mm
Pixel Configuration	RGB Vertical Stripe	-
Display Mode	VA Type Transmissive Mode Normally Black	-
Surface Treatment	Hard coating (3H), Anti-glare (Haze 25%)	-
Viewing Direction	Full view angle	-
Outline Dimension	225.5(W)×176.3(H)×9.34(D)	mm
Weight	395	g
RoHS Compliance	P-tec certifies this product to be in compliance with European Union Directive 2011/65/EU on the restriction of certain hazardous substances in electrical and electronic equipment.	-



7. Absolute Maximum Ratings


7.1 Absolute Ratings of Environment

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T _{ST}	-30	+80	°C	(1)(2)
Operating Ambient Temperature	T _{OP}	-30	+80	°C	(1)(2)

Note (1) 90 %RH Max. (Ta ≤ 40 °C).

(2) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).

(3) No condensation.

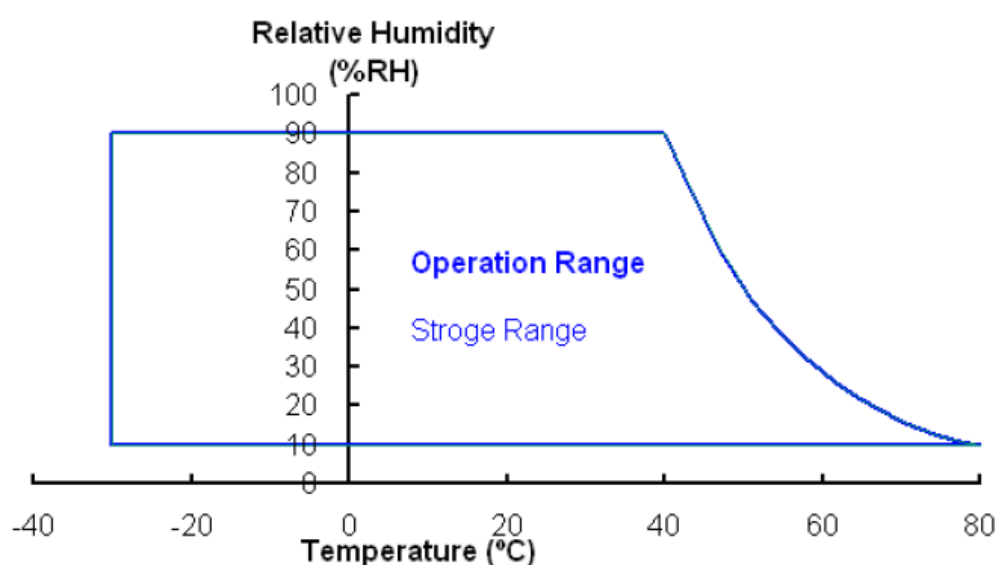

7.2 Electrical Absolute Ratings

7.2.1 TFT-LCD Module

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCC	-0.3	7	V	(1)

7.2.2 LED CONVERTER

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Converter Voltage	V _i	-0.3	18	V	(1), (2)
Enable Voltage	EN	---	5.5	V	
Backlight Adjust	ADJ	---	5.5	V	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for LED (Refer to 8.2 for further information).



8. Electrical Characteristics


8.1 TFT-LCD Module

(Ta=25±2°C)


ITEM		SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Power Supply Voltage		VCC	3.0	3.3	3.6	V	VCC=3.3V
			4.75	5.0	5.25	V	VCC=5.0V
Power Supply Current	White	ICC	390	490	540	mA	(3)a, VCC=3.3V
			290	390	440	mA	(3)a, VCC=5.0V
	Black		370	470	520	mA	(3)b, VCC=3.3V
			280	380	430	mA	(3)b, VCC=5.0V
Power Consumption		PL	-	1.617	-	W	VCC=3.3V
Logic input voltage		VIH	0.7VCC	-	VCC	V	
		VIL	0	-	0.3VCC	V	

Note (1) The module is recommended to operate within specification ranges listed above for normal function.

Note (2) Measurement Conditions:

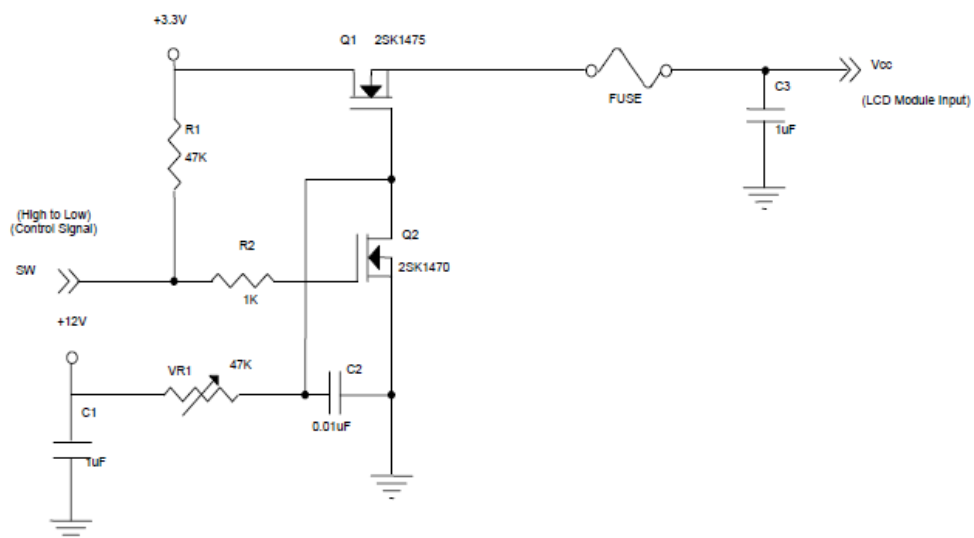

Vcc rising time is 470μs

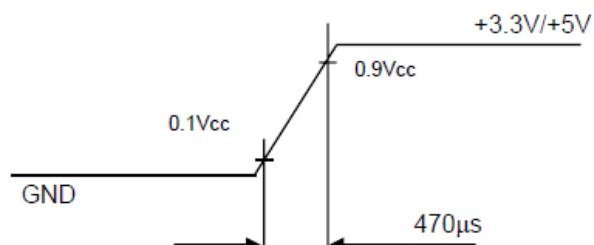




Note (3) The specified power supply current is under the conditions at $T_a = 25 \pm 2^\circ\text{C}$, $f_v = 60\text{ Hz}$, whereas a power dissipation check pattern below is displayed.

a. White Pattern



Active Area

b. Black Pattern



Active Area

8.2 Backlight Unit

($T_a = 25 \pm 2^\circ\text{C}$)


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Converter Power Supply Voltage		V_i	10.8	12.0	12.6	V	(Duty 100%)
Converter Power Supply Current		I_i	---	0.61	---	A	(1) $V_i = 12\text{V}$ (Duty 100%)
Converter Power Consumption		P_i	---	7.32	---		(1) $V_i = 12\text{V}$ (Duty 100%)
EN Control Level	Backlight on		2.0	3.3	5.0	V	
	Backlight off		0	---	0.8	V	
PWM Control Level	PWM High Level		2.0	3.3	5.0	V	
	PWM Low Level		0	---	0.8	V	
PWM Control Duty Ratio			20		100	%	
PWM Control Frequency		f_{PWM}	190	200	210	Hz	
LED Life Time		L_L	50,000			Hrs	(2)

Note (1) LED current is measured by utilizing a high frequency current meter as shown below:

Note (2) The lifetime of LED is defined as the time when it continues to operate under the conditions at

$T_a = 25 \pm 2^\circ\text{C}$ and $I_{\text{LED}} = 80\text{mA}_{\text{DC}}$ (LED forward current) until the brightness becomes $\leq 50\%$ of its original value. And minimum LED lifetime is estimated and provided by Nichia in Japan.

Operating LED under high temperature environment will reduce life time and lead to color shift.

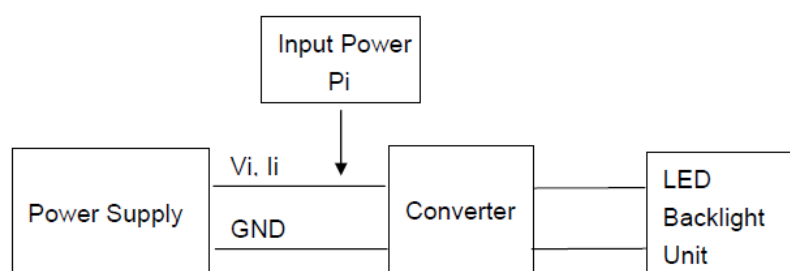



P-TEC


MODEL NO.

PT6448104A-MLMWF-EM08


SPEC ONLY

PAGE

9

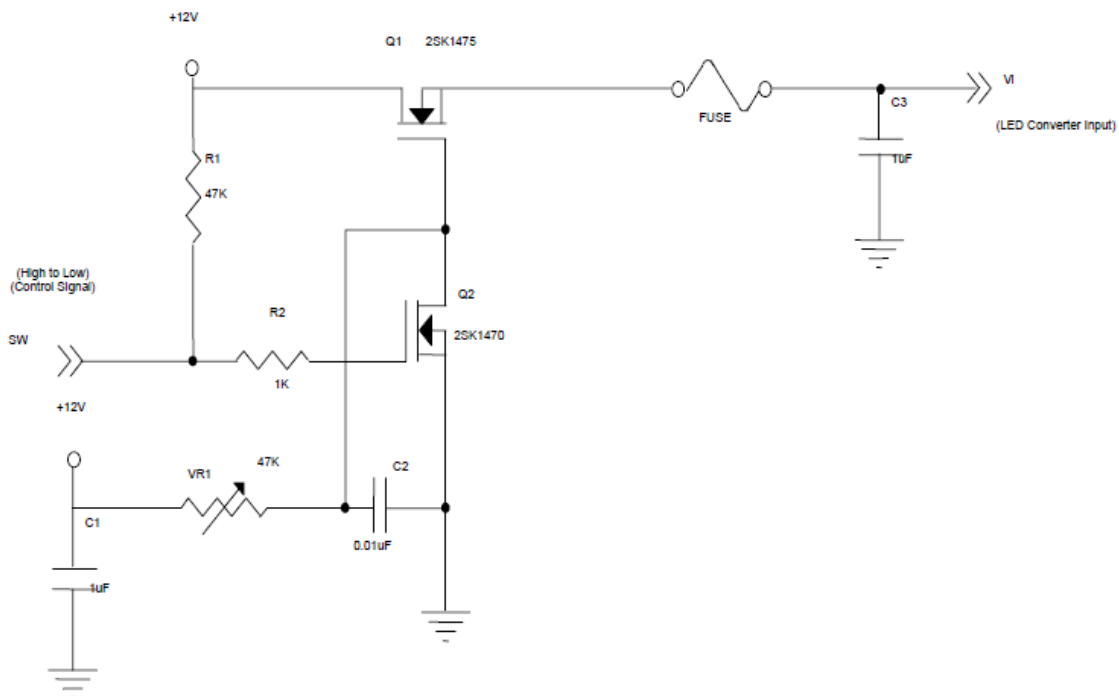

Vi rising time is 470us

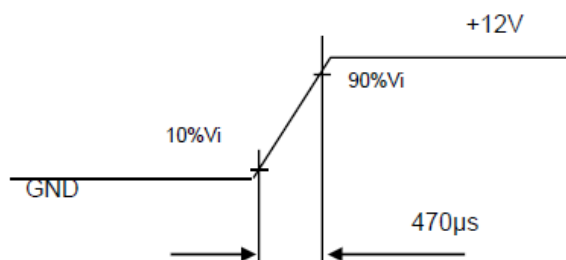



P-TEC

MODEL NO.

PT6448104A-MLMWF-EM08


SPEC ONLY

PAGE

10

9. Block Diagram

9.1 TFT-LCD Module with Backlight Unit

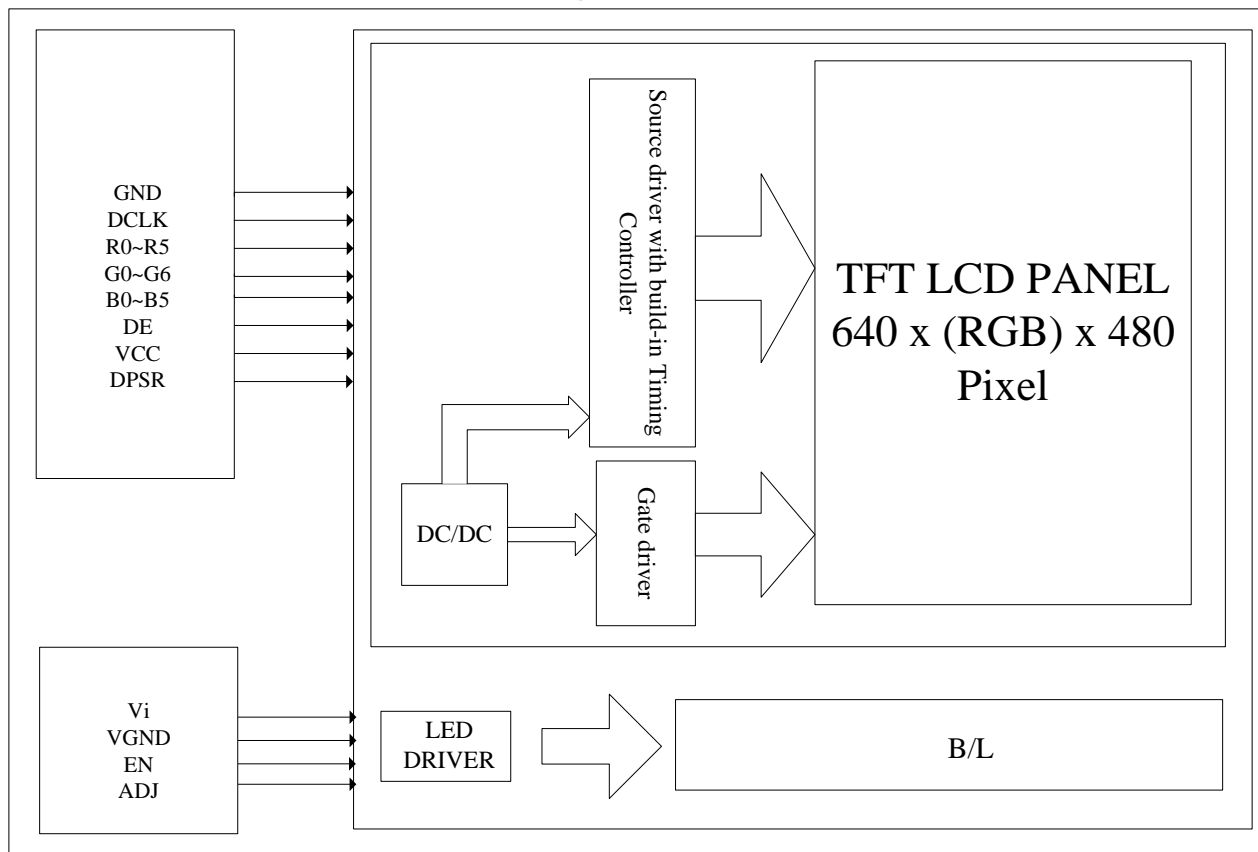



10. Input / Output Terminals Pin Assignment

10.1 TFT-LCD Module

Pin	Name	Description
1	GND	Ground
2	DCLK	Dot clock
3	N.C.	N.C.
4	N.C.	N.C.
5	GND	Ground
6	R0	Red data (LSB)
7	R1	Red data
8	R2	Red data
9	R3	Red data
10	R4	Red data
11	R5	Red data (MSB)
12	GND	Ground
13	G0	Green data (LSB)
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data (MSB)
19	GND	Ground
20	B0	Blue data (LSB)
21	B1	Blue data
22	B2	Blue data
23	B3	Blue data
24	B4	Blue data
25	B5	Blue data (MSB)
26	GND	Ground
27	DE	Data enable signal
28	VCC	Power supply
29	VCC	Power supply
30	N.C.	Reserved, please keep it floating.
31	DPSR	Selection of scan direction

Note (1) Connector Part No.: DF 9C-31P-1V or equivalent.

**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

12

10.2 Backlight

Pin	Symbol	Description	Remark
1	V_i	Converter input voltage	12V
2	V_{GND}	Converter ground	Ground
3	EN	Enable pin	
4	ADJ	Backlight Adjust	PWM Dimming
5	NC	Not Connect	

Note (1) Connector Part No.: 3823K-F05N-00L (Entery) or equivalent

Note (2) User's connector Part No.: H208K-P05N-02B (Entery) or equivalent



10.3 Color Data Input Assignment

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Gray Scale Of Green	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Gray Scale Of Blue	Blue(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:

Note (1) 0: Low Level Voltage, 1: High Level Voltage



11. Interface Timing

11.1 Input Signal Characteristics


Timing Characteristics

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Dot Clock	Frequency	Fc	21	25.175	29	MHz	-
	Duty		0.4	0.5	0.6		
Dot Data	Setup Time	Tlvs	8	-	-	ns	-
	Hold Time	Tlvh	12	-	-	ns	-
Horizontal Active Display Term	Frame Rate	Fr	-	60	-	Hz	$T_v = T_{vd} + T_{vb}$
	Total	T_v	730	800	900	Th	-
	Display	T_{vd}		640		Th	-
	Blank	T_{vb}	90	160	260	Th	-
Vertical Active Display Term	Total	T_h	485	525	800	Tc	$T_h = T_{hd} + T_{hb}$
	Display	T_{hd}		480		Tc	-
	Blank	T_{hb}	5	45	320	Tc	-

Note : (1) This module is operated by DE only mode

(2) Frame rate is 60Hz


INPUT SIGNAL TIMING DIAGRAM

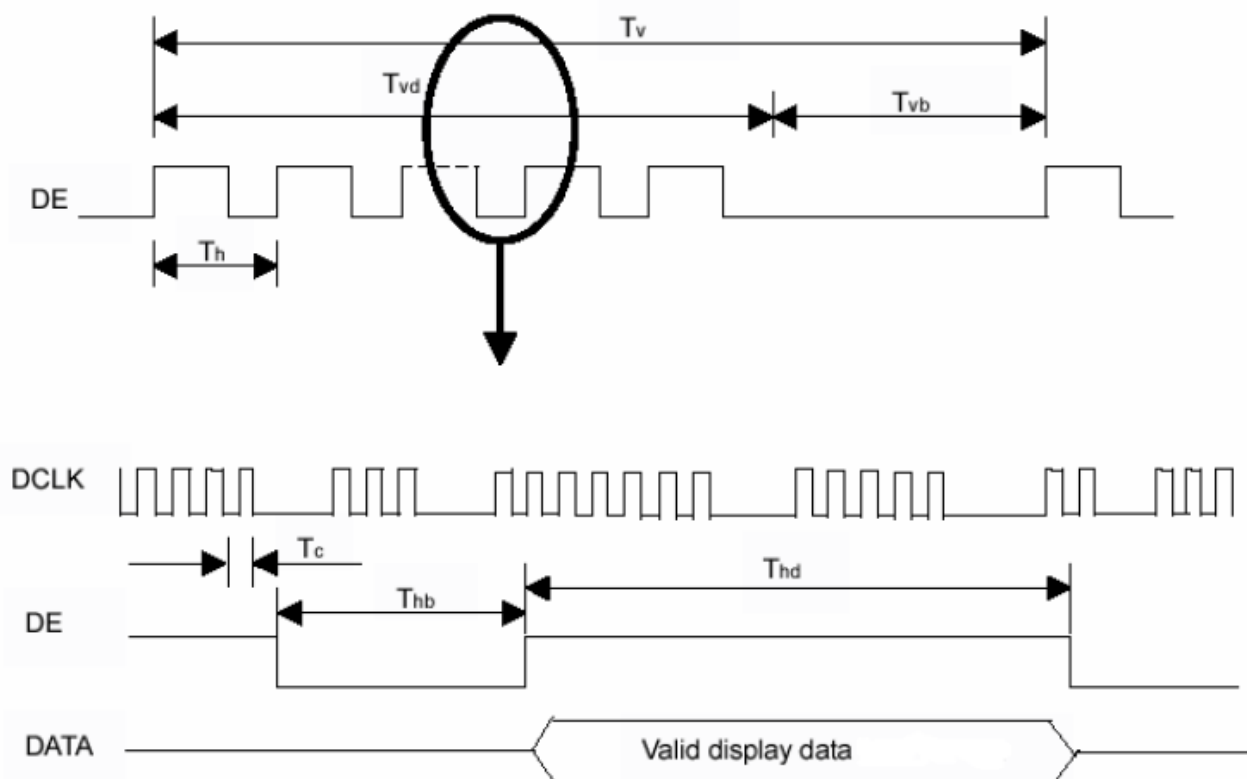



11.2 Power Sequence

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should follow the conditions shown in the following diagram.

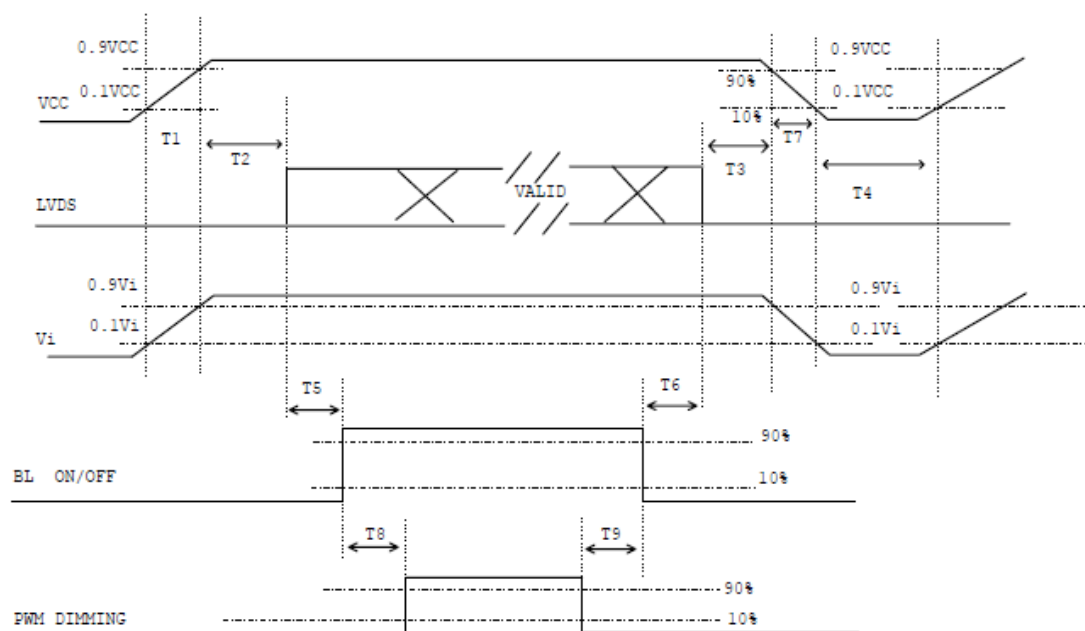


Power ON/OFF sequence

Note (1) Please avoid floating state of interface signal at invalid period.

Note (2) When the interface signal is invalid, be sure to pull down the power supply of LCD VCC to 0 V.

Note (3) The Backlight converter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight converter power must be turned off before the power supply for the logic and the interface signal is invalid.

Parameter	Value			Units
	Min	Typ	Max	
T1	0.5	-	10	ms
T2	0	-	50	ms
T3	0	-	50	ms
T4	500	-	-	ms
T5	200	-	-	ms
T6	20	-	-	ms
T7	5	-	300	ms
T8	10	-	-	ms
T9	10	-	-	ms

 P-TEC	MODEL NO.		PAGE
	PT6448104A-MLMWF-EM08	SPEC ONLY	16

11.3 Scanning Direction

The following figures show the image see from the front view. The arrow indicates the direction of scan.



Figure1.Normal scan (DPSR : Low or Open)



Figure 2. Reverse scan (DPSR : High)


**12. Optical Characteristics**

The optical characteristics should be measured in a dark environment (≤ 1 lux) or equivalent state with the methods shown in Note (4).

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_Y=0^\circ$ Viewing Normal Angle	1000	1500	-	-	(2)
Response Time		T _R		-	14	19	ms	(3)
		T _F		-	9	14		
Luminance(Center)		Y		450	500	-	cd/m ²	(4)
White Variation		δW		-	-	1.4		(5)
Color Chromaticity	Red	R _x		0.569	0.619	0.669	-	(1),(4)
		R _y		0.307	0.357	0.407	-	
	Green	G _x		0.283	0.333	0.383	-	
		G _y		0.512	0.562	0.612	-	
	Blue	B _x		0.095	0.145	0.195	-	
		B _y	0.042	0.092	0.142	-		
	White	W _x	0.263	0.313	0.363	-		
		W _y	0.279	0.329	0.379	-		
Viewing Angle	Horizontal	θ_{x+}	CR≥10	80	88	-	deg.	
		θ_{x-}		80	88	-		
	Vertical	θ_{y+}		80	88	-		
		θ_{y-}		80	88	-		




Note (1) Definition of Viewing Angle (θ_x , θ_y):

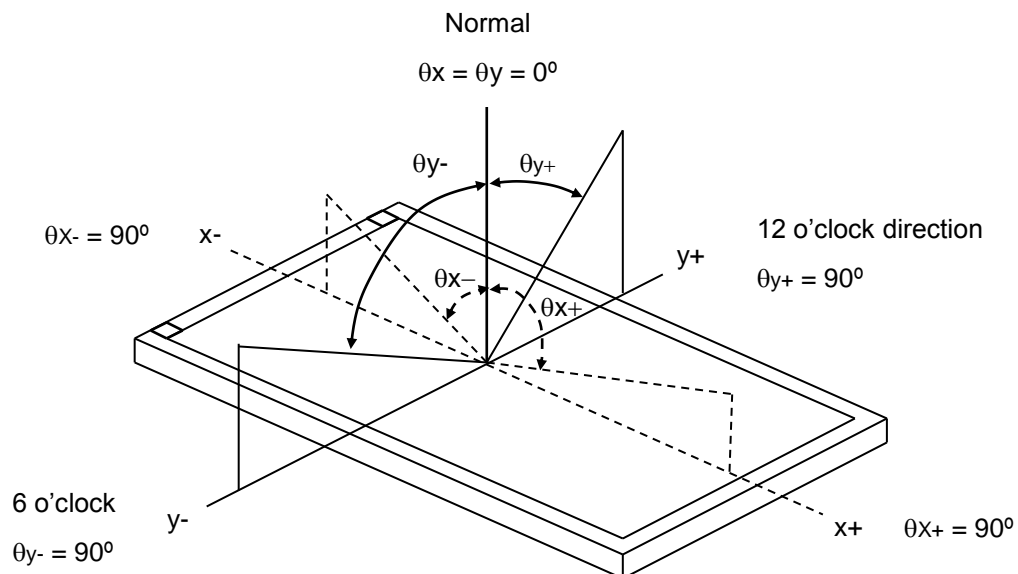

Note (2) Definition of Contrast Ratio (CR):


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note (3) Definition of Response Time (T_R , T_F):

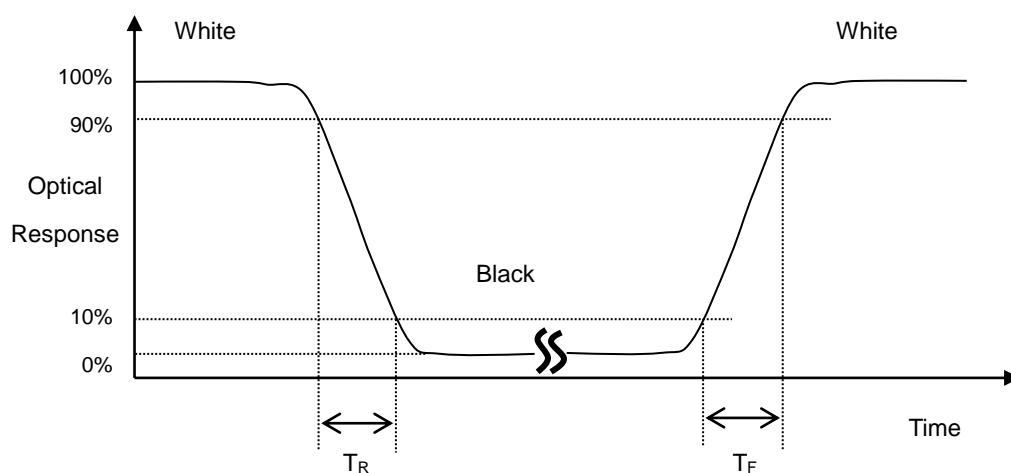


**Note (4) Measurement Set-Up:**

The LCD module should be stabilized at a given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a dark room or equivalent condition.

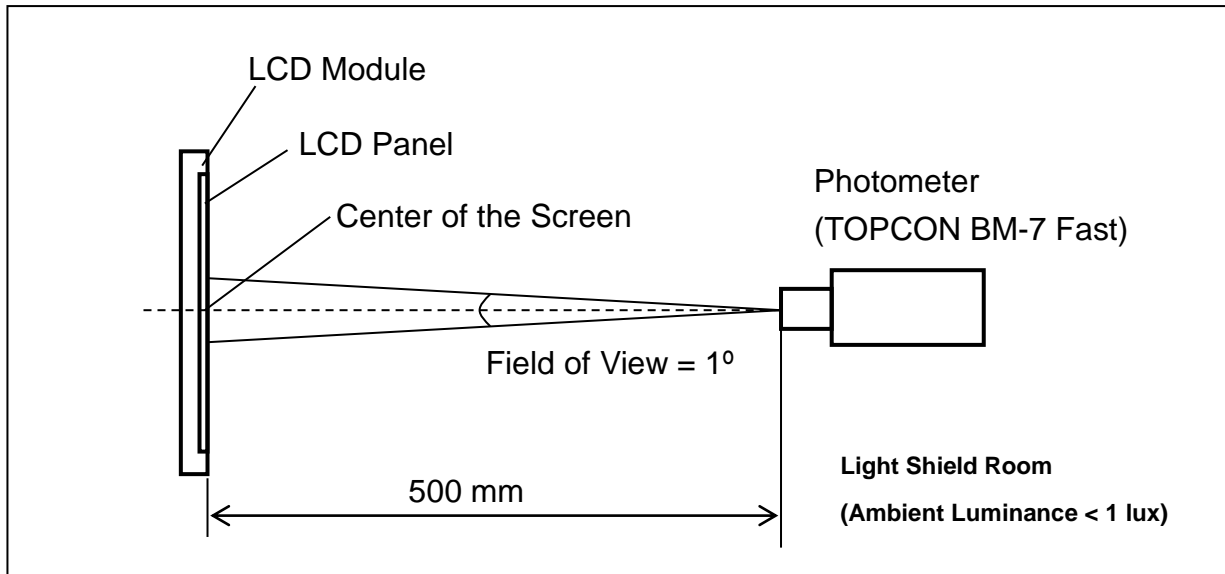**Note (5) Definition of White Variation (δW) :**

Measure the luminance of gray level 255 at 5 points

$$\delta W = \text{Maximum [L (1), L (2), L (3), L (4), L (5)] / Minimum [L (1), L (2), L (3), L (4), L (5)]}$$

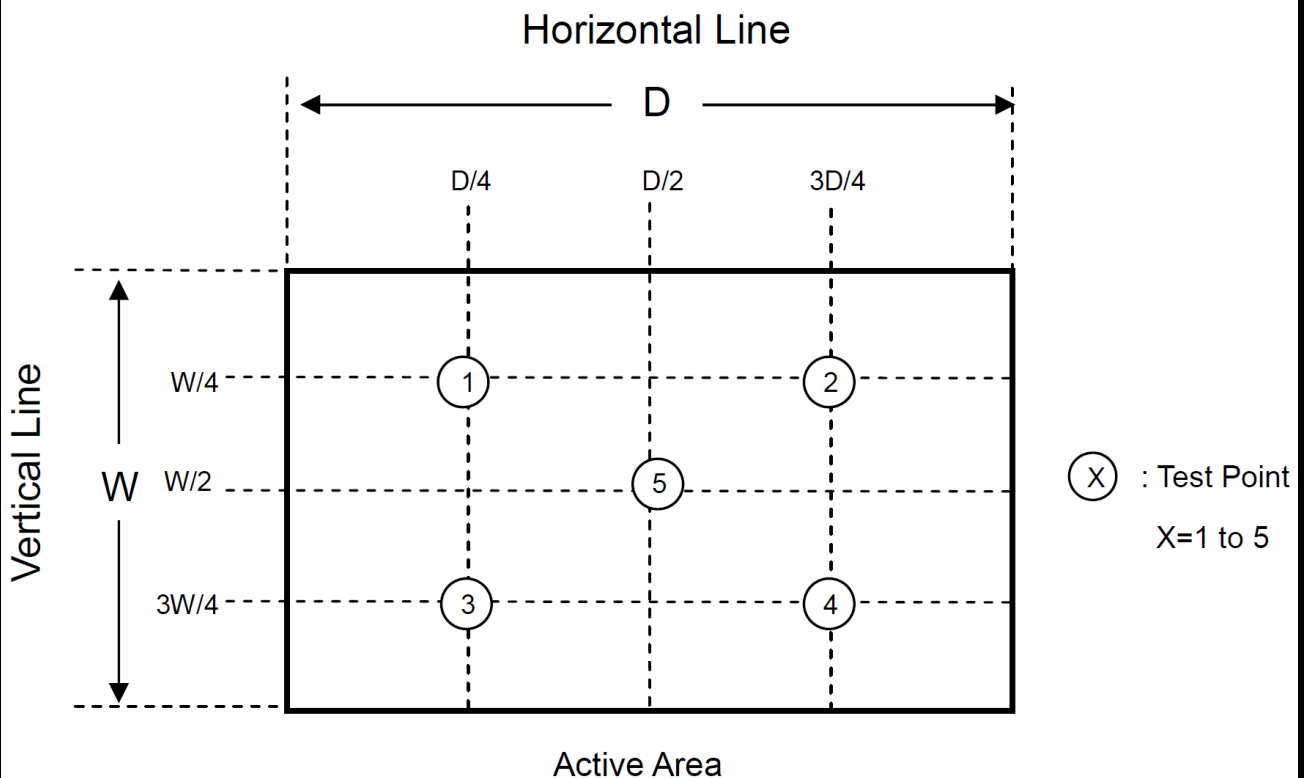

**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

20

13. Reliability Test

Test Item	Test Condition	Note
High Temperature Storage Test	80°C, 240 hours	(1) (2) (4)
Low Temperature Storage Test	-30°C, 240 hours	
Thermal Shock Storage Test	-30°C, 0.5hour \longleftrightarrow 80°C, 0.5hour; 100cycles, 1hour/cycle	
High Temperature Operation Test	80°C, 240 hours	
Low Temperature Operation Test	-30°C, 240 hours	
High Temperature & High Humidity Operation Test	60°C, 90%RH, 240hours	
Shock (Non-Operating)	200G, 2ms, half sine wave, 1 time for $\pm X$, $\pm Y$, $\pm Z$.	(3) (4)
Vibration (Non-Operating)	1.5G, 10 ~ 300 Hz, 10min/cycle, 3 cycles each X, Y, Z	(3) (4)

Note (1) There should be no condensation on the surface of panel during test.

Note (2) Temperature of panel display surface area should be 85 °C Max.

Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

Note (4) In the standard conditions, there is no function failure issue occurred. All the cosmetic specification is judged before reliability test.



P-TEC

MODEL NO.


PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

21

14. Packaging

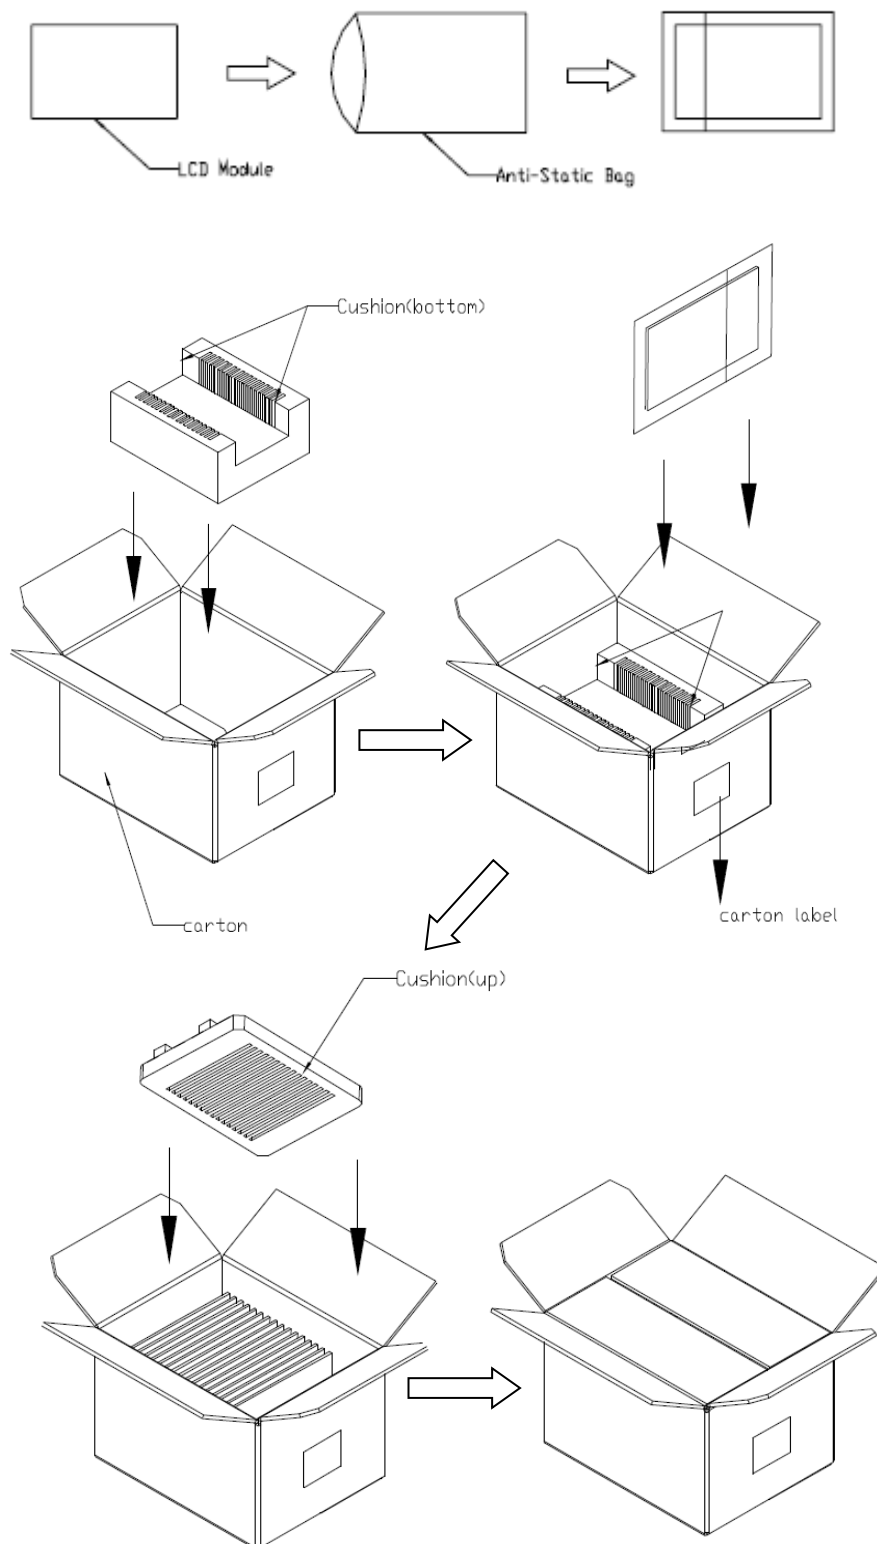

(1) 18pcs Modules/1 box

(2) Carton dimensions : 465(L)x362(W)x314(H)mm



15. Precautions

15.1 Assembly and Handling Precautions

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) It's recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) Don't apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- (4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- (5) Do not plug in or pull out the I/F connector while the module is in operation.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) Moisture can easily penetrate into LCD module and may cause the damage during operation.
- (9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD module in the specified storage conditions.
- (10) When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow.

15.2 Safety Precautions

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.

15.3 Terms of Warrant

- (1) Acceptance inspection period

The period is within one month after the arrival of contracted commodity at the buyer's factory site.

- (2) Applicable warrant period

The period is within twelve months since the date of shipping out under normal using and storage conditions.



P-TEC

MODEL NO.


PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE


23

16.Outline Drawing

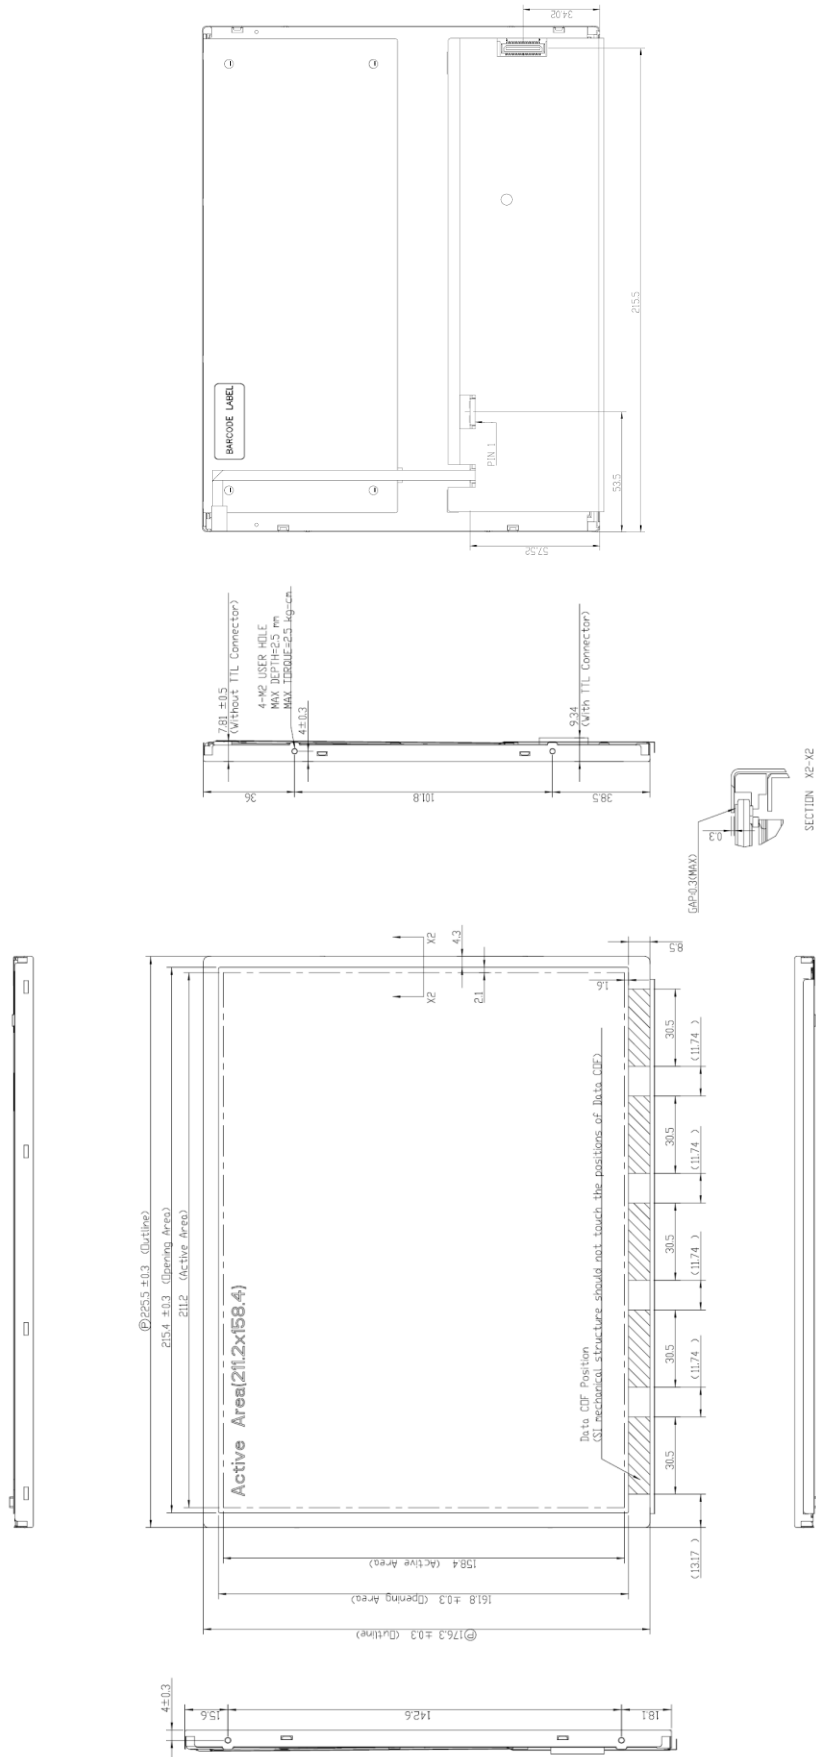


**17. Definition of Labels**

The bar code nameplate is pasted on each module as illustration, and its definitions are as following explanation.

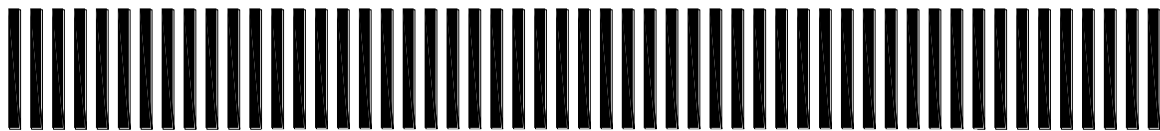

PT6448104A-MLMWF-EM

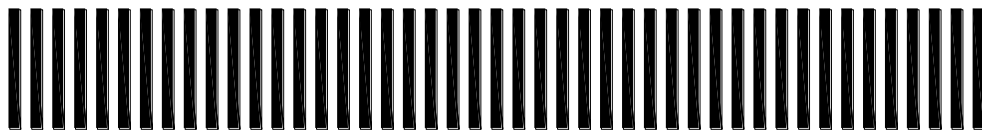


ABCDEFGHIJKL

(a) Module Name : PT6448104A-MLMWF-EM

(b) Serial ID :

A B C D E F G H I J K L

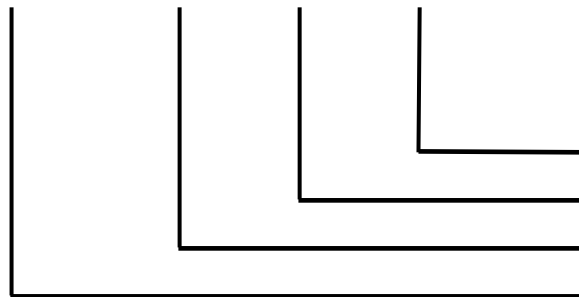

Serial No.
Factory Code
Manufactured Date
Screen Size

Serial ID includes the information as below:

(a) Screen size (Diagonal): Inch Code (ABCD)

3.5" → 0350

10.4" → 1040

(b) Manufactured Date: Year, Month, Day (EFG)

Year (E)

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Mark	0	1	2	3	4	5	6	7	8	9
Year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019
Mark	A	B	C	D	E	F	G	H	I	J

**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

25

Month (F)

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

Day (G)

Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Mark	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G
Day	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
Mark	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	

(c) Factory Code (H):

For P-TEC internal use.

(d) Serial No. (IJKL):

Manufacturing sequence of product, for example: 0001~9999.



18. Incoming Inspection Standards

18.1 The environmental condition of inspection


1.Description

These inspection standards shall be applied to LCD Module supplied by P-TEC ELECTRONICS LTD.

2.The environmental condition of inspection

The environmental condition and visual inspection shall be conducted as below.

- (1) Ambient temperature_15~25°C
- (2) Humidity_25~75 %RH
- (3) External appearance inspection shall be conducted by using a single 20W fluorescent lamp or equivalent illumination.
- (4) Panel visual inspection on the operation condition for cosmetic shall be conducted at the Distance 35cm or more between the LCD module and eyes of inspector.
Ambient Illumination_300 ~ 500 Lux for external appearance inspection
Ambient Illumination_100 ~ 200 Lux for light on inspection
- (5) The viewing angle_
 - a) 15 degree to the front surface of display panel in vertical direction.
 - b) 45 degree to the front surface of display panel in horizontal direction.
- (6) ND filter shall be conducted at the distance 2 cm to front surface of display panel and shall be conducted at the distance 35 cm between the LCD module and eyes of inspector.

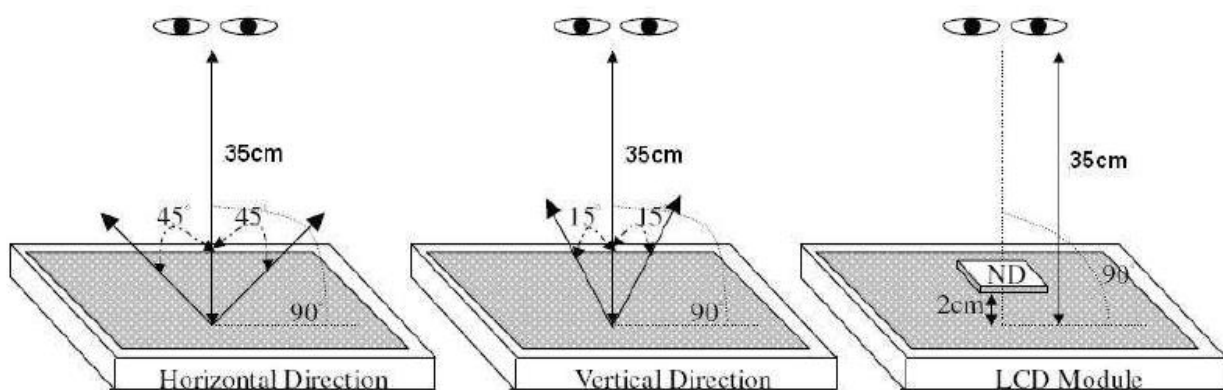



3. Classification of defects

Defects are classified two types, major defect and minor defect according to the defect. And, the definition of defects is classified as below.

(1) Major defect

Any defect may result in functional failure, or reduce the usability of product for its purpose. For example, electrical failure, deformation and etc..

(2) Minor defect

A defect that is not to reduce the usability of product for its intended purpose and un-uniformity, dot defect and etc..

The criteria on major or minor judgment will be according with the classification of defects.

4. Inspection Criteria

(1) Definition of dot defect induced from the panel inside

- a) Bright dot : Dots appear bright and unchanged in size in which module is displaying under black pattern.
- b) Dark dot : Dots appear dark and unchanged in size in which module is displaying under pure red, green, blue, white picture.
- c) 2 Full dot adjacent = 1pair.

Picture :

(a) Full dot



(b) 2 Full dot adjacent



(c) Spot defect



**P-TEC****MODEL NO.**

PT6448104A-MLMWF-EM08

SPEC ONLY

PAGE

28

(2) Display Inspection standards


Items		Acceptable count
Full Bright dot	Random	$N \leq 3$
	2 dots adjacent	$N \leq 1$
	3 dots adjacent or more	$N \leq 0$
Full Dark dot	Random	$N \leq 5$
	2 dots adjacent	$N \leq 1$
	3 dots adjacent or more	$N \leq 0$
Total Full Bright and Full Dark dot		$N \leq 5$
Distance	Minimum Distance Between Full Bright dots	$L \geq 10\text{mm}$
	Minimum Distance Between Full Dark dots	$L \geq 10\text{mm}$
Display failure (V-line/H-line/Cross line etc.)		Not allowable
Mura	Not visible through 6% ND filter in 50% gray or judge by limit sample if necessary	

(3) Appearance inspection

Item	Standards
Foreign Black/White/Bright Spot	$D \leq 0.15\text{mm}$, Ignore $0.15 < D \leq 0.5 \text{ mm}$, $N \leq 4$
Foreign Black/White/Bright Lint	$W \leq 0.05\text{mm}$, Ignore $0.05 < W \leq 0.1 \text{ mm}$, $0.3 < L \leq 2.0 \text{ mm}$, $N \leq 4$
Polarizer Scratches	$W \leq 0.05\text{mm}$, Ignore $0.05 < W \leq 0.1 \text{ mm}$, $0.3 < L \leq 10.0 \text{ mm}$, $N \leq 4$
Dent/Air Bubble	Avg. $0.15 < D \leq 0.5 \text{ mm}$, $N \leq 4$


Note.1

$$D = (a+b)/2$$



Note.2

W: width, L : length




**5.External Appearance Inspection Criteria**

Item	Contents	
Screw	Parts mounting, incomplete assembly, deformation, oxidized, crooked or rusty is not permitted.	
CCFT cable	Cable not continuous 、Break-off 、Connector Burn-off /Break-off	
Metal frame (Bezel)	Scratch	*Noticeable scratch and exfoliation coating are not permitted. *The oxidized metal is not permitted.
	Incomplete assembly is not permitted.	
Backlight	Scratch	The scratch which may causes a problem in practical use is not permitted.
	Break-off	Breaking off is not permitted.
	Crack	The crack is not permitted.
Stain on Polarizer	The stain, which can't be wiped off, is not permitted.	
Tape/Label	Incorrect position, missed label is not permitted.	
Connector	Oxidized/rusty connector is not permitted.	
Outline size	Spec. out is not permitted.	

6.Classification of defects

Inspection Item	Criteria and Description	Defect type
Vertical line	Signal input, vertical line off or irregular V-line appears	major
Horizontal line	Signal input, horizontal line off or irregular H-line appears	major
Cross line	Pattern signal input, a correct display is not obtained	major
No display	Signal input, display is dead	major
Irregular display	Pattern signal input, a correct display is not obtained	major
Dots defect	Exceed specified standards	minor
Scratch and Dent on polarizer	Exceed specified standards	minor
Foreign material	Exceed specified standards	minor
Mura	Not visible through 6% ND filter in 50% gray pattern. or judge by limit sample	minor
Polarizer bubble	Exceed specified standards	minor

 P-TEC	MODEL NO.		PAGE
	PT6448104A-MLMWF-EM08	SPEC ONLY	30

18.2 Handling of LCM

- (1)Don't give external shock.
- (2)Don't apply excessive force on the surface.
- (3)Liquid in LCD is hazardous substance. Must not lick and swallow. when the liquid is attach to your hand, skin, cloth etc. Wash it out thoroughly and immediately.
- (4)Don't operate it above the absolute maximum rating.
- (5)Don't disassemble the LCM.